



TRIMBLE NetR9 GNSS REFERENCE RECEIVER

KEY FEATURES

Proven GNSS technology from Trimble

440 channels for unmatched GNSS tracking performance

Bluetooth®, Ethernet, Serial and USB support

Large capacity internal memory plus external USB device logging capability

Convenient front panel display and configuration

Power over Ethernet (PoE) technology

Eight independent logging sessions

Multiple data file formats

Integrated battery which can act as a primary power source or as an uninterrupted power supply (UPS) backup

Powerful remote configuration and access



The Trimble® NetR9™ Global Navigation Satellite System (GNSS) reference receiver is a fully featured, top-of-the-line reference receiver designed to provide an operator with maximum features and functionality from a single receiver.

Utilizing the proven Trimble R-Track™ technology in combination with two Trimble Maxwell™ 6 chipsets, the Trimble NetR9 reference receiver offers an industry-leading 440 channels for unmatched GNSS multi-constellation tracking performance. With the world's GNSS in constant development, the Trimble NetR9 reference receiver provides the operator with the assurance that it has the capability to grow with the industry, both today, and well into the future.

The Trimble NetR9 reference receiver supports a wide range of satellite signals, including GPS L1, L2, L5 and GLONASS L1/L2 signals. In addition, Trimble is committed to the next generation of modernized GNSS configurations by providing Galileo-compatible products. In support of this plan, the new Trimble NetR9 reference receiver is capable of tracking the experimental GIOVE-A and GIOVE-B test satellites for signal evaluation and test purposes^{1,2}.

The Trimble NetR9 reference receiver supports the new CMRx communications protocol, which provides unprecedented correction compression for optimized bandwidth and full utilization of all satellites in view. This gives you the most reliable positioning performance.

The Trimble NetR9 reference receiver's compact form factor, low power consumption and powerful network capabilities make for an ideal combination supporting a wide range of applications. A few specific examples include high-accuracy positioning as part of a Trimble VRS™ network, as a mobile field base station for Real-Time Kinematic (RTK) applications, for atmospheric research, as a Continuously Operating Reference Station (CORS), as a field campaign receiver for post-processing applications, and as support for Differential Global Positioning System (DGPS) MSK beacons. In addition, the Trimble NetR9 reference receiver can also be used for monitoring the integrity of VRS networks as well as physical infrastructure such as oil platforms, mines, dams, bridges, or other natural and manmade objects when precise deformation is crucial.

The rugged Trimble NetR9 reference receiver is a top-notch device that offers the latest in GNSS technology. It has physical memory built into the circuit board, providing a high level of data protection, an integrated battery for up to

15 hours of operating time and is tested to IP67 and MIL-STD 810F for environmental protection. When it comes to logging data for any type of post-processing work, the Trimble NetR9 reference receiver excels. And, with an internal storage of eight gigabytes, along with support of external USB logging devices, the Trimble NetR9 reference receiver offers unparalleled storage capacity. In addition, the Trimble NetR9 reference receiver can log data at rates up to 50 Hz in a wide range of dissemination formats, including T02, RINEX, BINEX and Google Earth files. When these are factored together with FTP and Email Push technology, you can achieve an uncompromised blend of functionality and efficiency.

The Trimble NetR9 reference receiver comes with powerful built-in remote management. Utilizing Internet Protocol (IP) as the primary communications mechanism, the familiar Trimble Infrastructure web user interface provides full receiver status, configuration, firmware updates and data access, and supports a variety of security levels and access control. Furthermore, the receiver supports Email Alerts so the operator knows exactly what is taking place at the receiver. For simple hands-on configuration, the Trimble NetR9 reference receiver offers a seven-button, two-line display and status information so that performing in-field configuration is practically effortless. Best of all, no handhelds are required to get this job done.

With its feature rich design and robust functionality, you can trust Trimble to provide the very latest technology in the GNSS industry to help position your way into the future.

1. Galileo Commercial Authorization:

Receiver technology having Galileo capability to operate in the Galileo frequency bands and using information from the Galileo system for future operational satellites is restricted in the publicly available Galileo Open Service Signal-In-Space Interface Control Document (GAL OS SIS ICD) and requires commercial authorization for use. Receiver technology that tracks the GIOVE-A and GIOVE-B test satellites uses information that is unrestricted in the public domain in the GIOVE A + B Navigation Signals-In-Space Interface Control Document. Receiver technology having developmental GIOVE-A and B capability is intended for signal evaluation and test purposes.

2. For more information about Trimble and GNSS modernization, please visit http://www.trimble.com/srv_new_era.shtml.

SATELLITE TRACKING

- Two advanced Trimble Maxwell 6 GNSS chipsets for a total of 440 channels
- Trimble EVEREST™ multipath signal rejection
- Trimble R-Track™ technology
- High precision multiple correlator for GNSS pseudorange measurements
- Unfiltered, unsmoothed pseudorange measurements data for low noise, low multipath error, low time domain correlation and high dynamic response
- Very low noise GNSS carrier phase measurements with <1 mm precision in a 1 Hz bandwidth
- Signal-to-noise ratios reported in dB-Hz
- Proven Trimble low elevation tracking technology
- Current satellite signals tracked simultaneously:
 - GPS: L1 C/A, L2C, L2E (Trimble method for tracking L2P), L5
 - GLONASS: L1 C/A and unencrypted P code, L2 C/A¹ and unencrypted P code
 - Galileo GIOVE-A and GIOVE-B
 - SBAS: L1 C/A, L5 supporting WAAS, EGNOS and MSAS
 - L-Band OmniSTAR VBS, HP and XP

POSITIONING PERFORMANCE

Code Differential GNSS Positioning²

| | |
|---|----------------------|
| Horizontal | 0.25 m + 1 ppm RMS |
| Vertical | 0.50 m + 1 ppm RMS |
| WAAS differential positioning accuracy ³ | typically <5 m 3DRMS |

Static GNSS Surveying²

Baseline <30 km

| | |
|----------------------|--------------------|
| Horizontal | 3 mm + 0.1 ppm RMS |
| Vertical | 4 mm + 0.4 ppm RMS |

Baseline >30 km

| | |
|----------------------|------------------|
| Horizontal | 4 mm + 0 ppm RMS |
| Vertical | 9 mm + 0 ppm RMS |

Real Time Kinematic Surveying^{2,4}

Single Baseline <30 km

| | |
|----------------------|-------------------|
| Horizontal | 8 mm + 1 ppm RMS |
| Vertical | 15 mm + 1 ppm RMS |

Networked RTK⁵

| | |
|--------------------------------------|-----------------------|
| Horizontal | 8 mm + 0.5 ppm RMS |
| Vertical | 15 mm + 0.5 ppm RMS |
| Initialization time | typically <10 seconds |
| Initialization reliability | typically >99.9% |

COMMUNICATION

- Serial Ports
 - One D9 Male, EIA-574 RS-232/V.24 Full 9 wire serial
 - One Lemo 7 pin Oshell, 3 wire serial with power input, 1 PPS output and event input
 - One Mini B USB 5 pin; supports Device and Host mode operations
- Bluetooth⁶
 - Integrated 2.4 GHz Bluetooth; supports 3 simultaneous connections
- Ethernet
 - Integrated RJ45 jack
 - Full-duplex, auto-negotiate 100Base-T
 - Power over Ethernet (PoE) support with a Class 3 PoE supply
 - HTTP, HTTPS, TCP/IP, UDP, FTP, NTRIP Caster, NTRIP Server, NTRIP Client
 - Proxy server support
 - Routing table support
 - NTP Server, NTP Client support
 - UPnP and Zeroconf support
 - Email Alerts and File Push

DATA LOGGING


| | |
|--|--|
| Storage Capacity | |
| Onboard memory | 8 GB |
| External memory ⁷ | greater than 1 TB |
| Maximum logging rate | 50 Hz |
| File durations | 5 minutes to continuous |
| Storage sessions | 8 concurrent independent sessions with dedicated memory pooling and ring buffers |
| File formats | T02, RINEX v2.11, RINEX v3.0, BINEX, Google Earth KMZ |
| File naming options | multiple |
| Data retrieval and transfer | HTTP, FTP Server, USB, FTP Push and Email Push |
| Events | definable file protection on events |

PHYSICAL SPECIFICATIONS

| | |
|----------------------------------|--|
| Dimensions (L x W x H) | 26.5 cm x 13.0 cm x 5.5 cm (10.43 in x 5.12 in x 2.16 in) |
| Weight | 1.75 kg (3.85 lb) |


INPUT/OUTPUT FORMATS

- Correction Formats:
 - CMR, CMR+, CMRx, RTCM 2.1, RTCM 2.2, RTCM 2.3, RTCM 3.0, RTCM 3.1
- Observables:
 - RT17, RT27, BINEX, RTCM 3.x
- Position/Status I/O:
 - NMEA-0183 v2.30, GSOE
- Up to 50 Hz Output
- 10 MHz External Frequency Input
 - Normal input level 0 to +13 dBm
 - Maximum input level +17 dBm, ±35 V DC
 - Input impedance 50 Ohms @ 10 MHz; DC blocked
- 1 PPS Output
- Event Input
- Met/Tilt Sensor Support

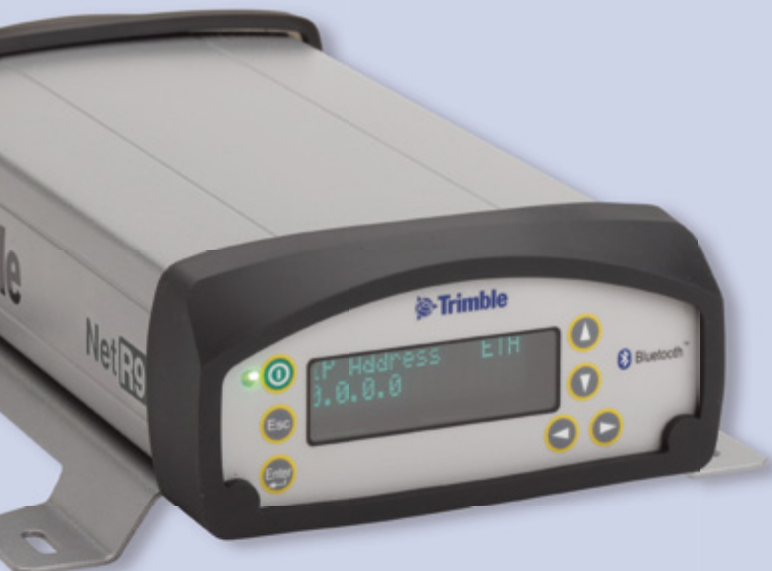



© 2010, Trimble Navigation Limited. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. EVEREST, Maxwell, NetR8, R-Track, VRS and Zephyr Geodetic are trademarks of Trimble Navigation Limited. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Navigation Limited is under license. All other trademarks are the property of their respective owners. PN 022506-128 (04/10)

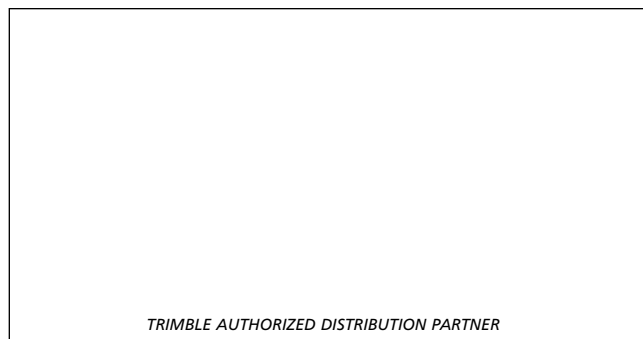

TRIMBLE AUTHORIZED DISTRIBUTION PARTNER

NORTH AMERICA

Trimble Engineering & Construction Group
5475 Kellenburger Road
Dayton, Ohio 45424-1099 • USA
800-538-7800 (Toll Free)
+1-937-245-5154 Phone
+1-937-233-9441 Fax

EUROPE

Trimble Germany GmbH
Am Prime Parc 11
65479 Raunheim • GERMANY
+49-6142-2100-0 Phone
+49-6142-2100-550 Fax

ASIA-PACIFIC

Trimble Navigation Singapore Pty Limited
80 Marine Parade Road
#22-06, Parkway Parade
Singapore 449269 • SINGAPORE
+65-6348-2212 Phone
+65-6348-2232 Fax



www.trimble.com

